



Max. Reach : 11m for DX210WA(LH Type)



Max. Reach : 11m for EC220D(BL Type)

- **LOADING, UNLOADING AND SORTING TIMBERS AND LOGS.**
- **HANDLING BEAM, LONGISH SCRAP AND WOOD WASTE.**


All packages come fully equipped with

- Boom and arm.
- Basic and open/close piping on boom and arm.
- Rotating and grease piping on boom and arm.
- Arm cylinder and arm cylinder guard.
- Bucket or heel cylinder and additional c/w kits.
- Pins from boom center to arm end.
- Optional riser cab kits available.


Features

- Reinforced box section design and high strength steel yields max. strength for tough working condition.
- Large diameter pins and wide joints absorb the strain of big loads.
- Live heel, bottom cylinder type as standard.
- Live heel, top cylinder type as option to provide more reach and height.
- A large variety of wood grapple available.
- Cylinder protection guard. (OPTION)

Working Range

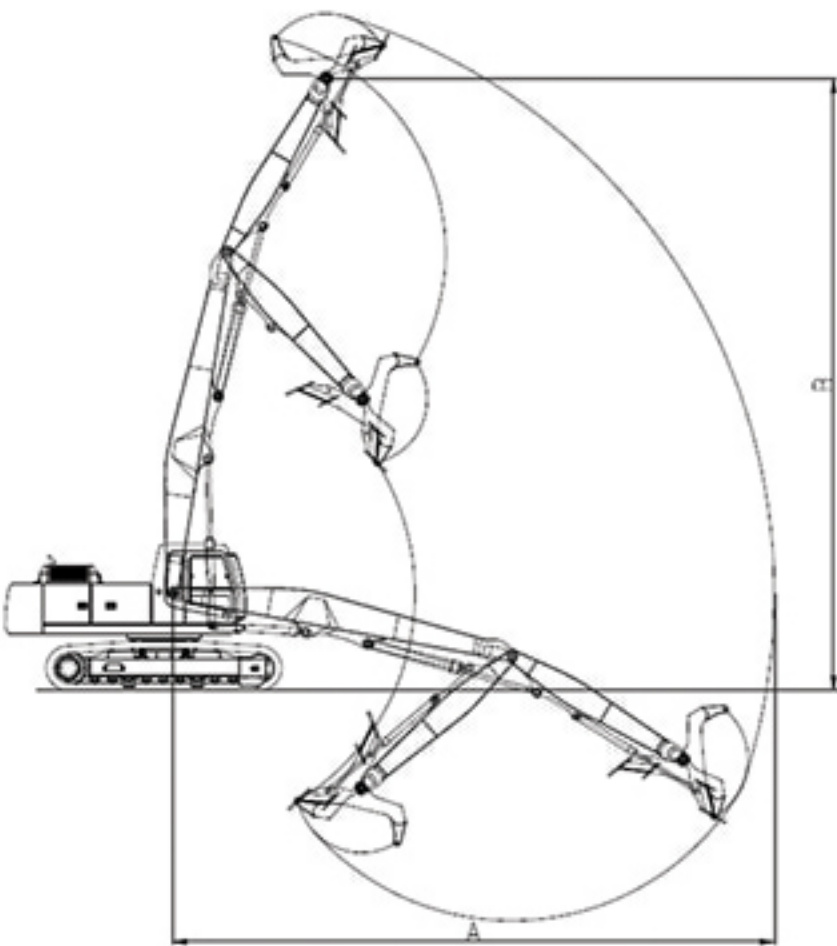

Live Heel Type (LT Type)

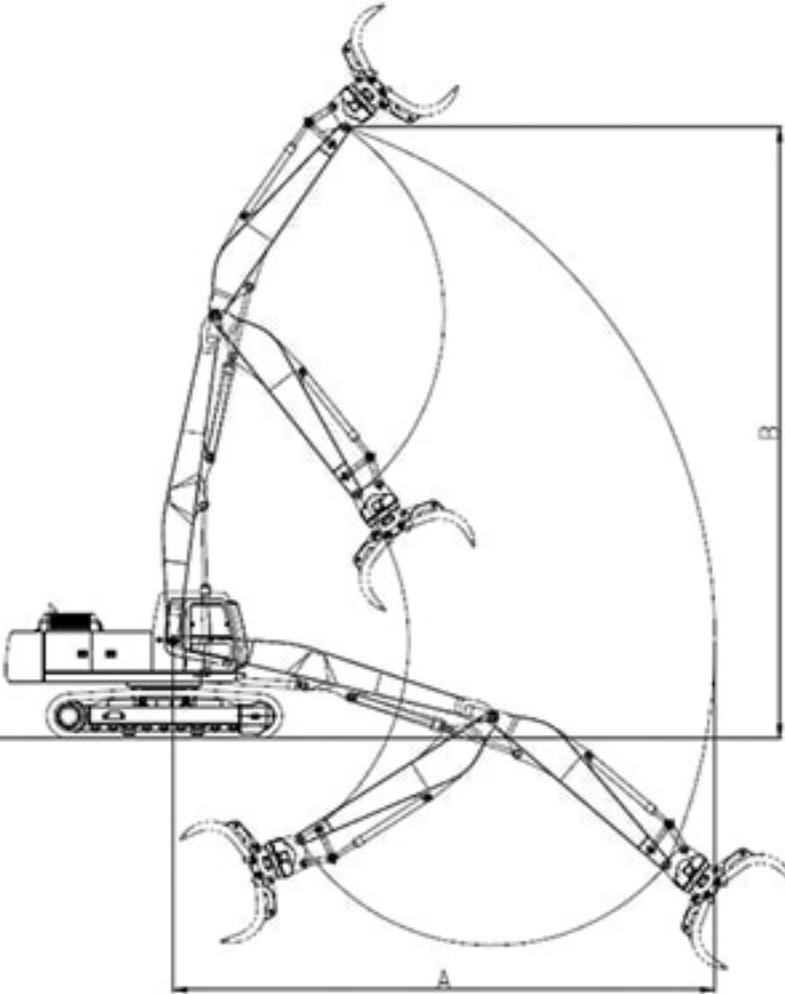

Bucket Linkage (BL Type)

Working range shown is a general representation and will vary with machine and attachment size.



Max. Reach : 11.6m for DX300L(BL Type)



Max. Reach : 11.6m for HX300L(LH Type)

EXCAVATOR CLASS			20 - 24 tons 44,000 - 53,000 lbs		24 - 27 tons 53000 - 59,000 lbs		27 - 32 tons 59,000 - 70,000 lbs		32 - 40 tons 70,000 - 88,000 lbs	
SNS MODEL			SLL21-36-LH	SLL21-29-BL	SLL25-36-LH	SLL25-34-BL	SLL30-38-LH	SLL30-38-BL	SLL36-43-LH	SLL36-43-BL
A	MAX. WORKING REACH	m	11.0	9.0	11.0	10.2	11.6	11.6	12.8	12.8
		ft	36'0"	29'5"	36'0"	33'5"	38'0"	38'0"	42'0"	42'0"
B	MAX. PIN HEIGHT	m	12.8	10.4	12.8	11.4	13.5	12.8	14.3	14.3
		ft	42'0"	34'1"	42'0"	37'4"	44'3"	42'0"	46'9"	46'9"

Working range shown is a general representation and will vary with machine and attachment size.
These details are for guidance only and may be changed for improvement without prior notice.

SLL Option Equipment

- Attachment



Power Grapple (SPG)



Log Grapple(SLG)



Wood Grapple (SWG-PT)