



Max. Reach : 8.9m for DX225LC



Max. Reach : 9.6m for DX420LC



Max. Reach : 10.1m for DX480LC



Max. Reach : 9m for DX260LCA


• **BOOM TILTING TYPE**

**All packages come fully equipped with**

- Base boom, tilt boom and arm.
- Tilt boom, arm, bucket cylinder and pins.
- Hydraulic piping for boom, arm.
- Lock valve piping for arm cylinder.

**Features**

- Tiltable boom with 2 x 45° mounting.
- Well-protected hoses and pipes by heavy-duty covers.
- Lock valve & piping on boom and arm cylinder for safety.
- Compatible with standard boom and arm.

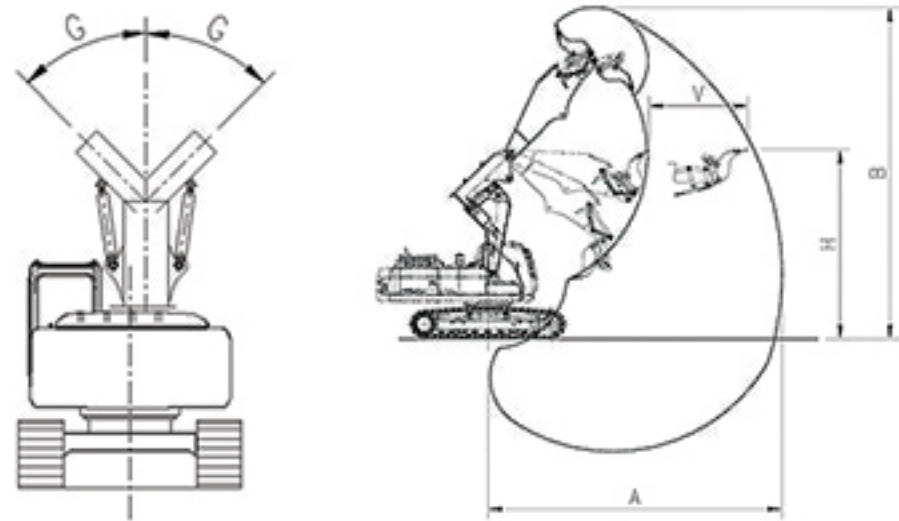

EXCAVATOR	SNS MODEL	SPEC.								
		MAX. REACH (A)		MAX. HIGHT (B)		TUNNEL HEIGHT (H)		ADVANCE (V)		ANGLE (G)
		m	ft	m	ft	m	ft	m	ft	
22 ton	STF21-30	9.1m	29'8"	10.0m	32'8"	6.0m	19'7"	2.8m	9'2"	35° ~ 45°
						6.5m	21'3"	2.7m	8'7"	
						7.0m	23'0"	2.5m	8'2"	
34 ton	STF36-31	9.3m	30'5"	10.1m	33'1"	7.0m	23'0"	2.3m	7'5"	35° ~ 45°
						7.5m	24'6"	2.0m	6'6"	
						8.0m	26'2"	1.8m	5'9"	
42 ton	STF42-31	9.5m	31'2"	10.6m	34'8"	7.5m	24'6"	2.6m	8'5"	35° ~ 45°
						8.0m	26'2"	2.4m	7'9"	
						8.5m	27'9"	2.1m	6'9"	
48 ton	STF45-33	10.1m	33'1"	10.1m	33'1"	8.0m	26'2"	2.8m	9'2"	35° ~ 45°
						8.5m	27'9"	2.7m	8'9"	
						9.0m	29'5"	2.5m	8'2"	

Working range shown is a general representation and will vary with machine and attachment size.

These details are for guidance only and may be changed for improvement without prior notice.